



2.4 Grinding Machine



2.5 Chamfering - Surfacing Machine



3-DIMENTIONAL VIBRATORY FINISHING MACHINE

Model	Fill Volume (kg)	Motor (HP)	Watt (kw)	Width Ø x H (mm)	Weight (kg)
VB-5	2	0.25	0.19	300x360	15
VB-10	2	0.25	0.19	350x460	16
VB-25	50	0.5	0.37	570x670	58
VB-50	100	1	0.75	696x850	260
VB-100	250	2	1.5	906x990	360
VB-150	380	3	2.25	1045x1035	460
VB-250	650	5	3.75	1200x1260	640
VB-350	800	7.5	5.62	1340x1330	750
VB-500	1000	10	7.5	1560x1560	1070
VB-750	1200	12	9	1730x1730	1660
VB-1000	1450	15	11.25	1850x1635	2000
VB-1200	1600	20	15	2080x1675	2300



2.5 Chamfering - Surfacing Machine




Automatic Chamfering Machine

Model	Range Ø (mm)	Length Range (mm)	Speed (pcs/min)	Motor (hp x pcs)	Machine Dimensions (L x W x H) (cm)	Weight (kgs)
YTC-180	3-10	60-180	25	Hydraulic Motor 2x1 Chamfer 1x1	105x60x155	600
YTC-1000	3-10	150-1000	25-32	Hydraulic Motor 2x1 Chamfer 1x2	220x125x160	1300
YTC-1000A	8-30	150-1000	10-12	Hydraulic Motor 3x1 Hydraulic Feeder 2x1 Chamfer 2x2	230x150x160	1700
YTC-2000	3-10	150-2000	25-32	Hydraulic Motor 3x1 Chamfer 1x2	320x125x165	1700
YTC-2000A	8-30	160-2000	10-12	Hydraulic Motor 3x1 Hydraulic Feeder 2x1 Chamfer 2x2	330x150x160	2200
YTC-3000	3-10	180-3000	25-32	Hydraulic Motor 3x1 Chamfer 1x2	420x125x165	2200
YTC-3000A	8-30	160-3000	8-10	Hydraulic Motor 3x2 Chamfer 2x2	430x150x160	2700
YTC-4000A	8-30	250-4000	8-10	Hydraulic Motor 3x3 Chamfer 2x2	530x170x160	3400
YTC-4000B	25-75	300-4000	4-8	Hydraulic Motor 3x2 Hydraulic Feeder 5x1 Chamfer 5x2	530x200x160	4800
YTC-6000A	8-30	250-6000	6-10	Hydraulic Motor 3x3 Chamfer 2x2	730x150x160	4500



2.5 Chamfering - Surfacing Machine

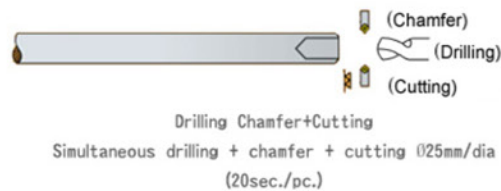

■ Horizontal drilling /chamfer cutting machine - Model LC-120S

Specifications / Model		LC-120S	Standard accessories
Spindle	Spindle speed (cut)	2000RPM Extra motor frequency converter 500~2000RPM	Tool Box Hydraulic vise 1 set Central lubrication system Cooling water system Level block & ground bolt Operation manual Motor frequency converter
	Drilling R.P.M.	2000RPM Extra motor frequency converter 500~2000RPM	
	Main spindle milling shank	SD45-15° collet	
	Drilling hole tilt	ER25	
	Spindle nose bearing dia.	Ø 125mm	
Travel	X axis travel cutting length	120 mm	Optional accessories
	Max. stock capacity	Ø30mm	
	Y axis travel (longitudinal)	100 mm	
	Z axis center height (slide table surface to main spindle center)	30 mm	ER25 collet chuck set Auto feed device Safely guard
Work table	Size	200 x 300 mm	
	T siat size	250 kgs	
	Weight load	420 kgs	
Feed	size	6500 mm/min	
	Cutting speed	1 ~ 6000 mm/min	
Motor	Spindle motor	5 HP/4P	
	Hydraulic pump	2 HP	
	Coolant motor	1/2 HP	
Machine size	Dimension LxWxH	1600 x 1350 x 1700 mm	
Machine weight	Kgs	1500 kgs	